

BC245-6 MDC | 6V 245Ah

Deep Cycle AGM Battery



BLACK BATT.

Specification


Rated Voltage	6V
Nominal Capacity (10 hour rate)	245Ah
Dimensions	Length 243 ± 3 mm (9.57inches)
	Width 187.5 ± 3 mm (7.38inches)
	Container Height 275 ± 3 mm (10.8 inches)
	Total Height 275 ± 3 mm (10.8 inches)
Approximate Weight	32.4 kg ± 3% (71.4 lbs)
Container Material	ABS
Operating Temp. Range	Discharge -20~55°C (-4~131°F)
	Charge 0~40°C (32~104°F)
	Storage -15~40°C (5~104°F)
	20 HR 245Ah
Capacity	5 HR 210Ah
	Electric vehicle
Applications	Golf cart / Mobility
	Cleaning equipment
	Plate assembly pressure re-engineering
Excellent deep cycle performance	New PAM/NAM recipe introduced
	Gel electrolyte technology
	Double layer separator technology
Designed floating life (20°C)	10 years




Dimensions | Terminal Type (unit:mm)

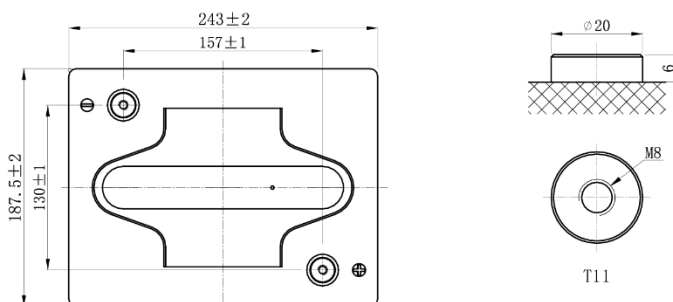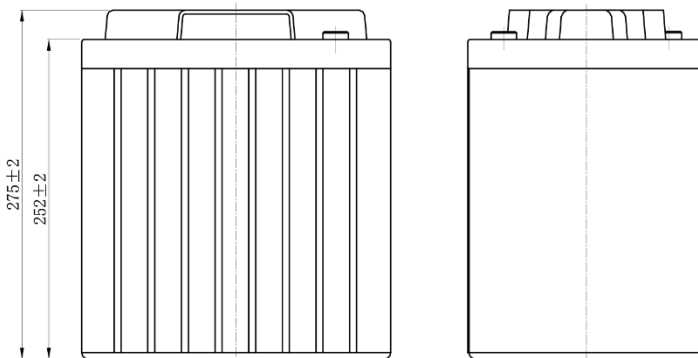

Charging Profiles

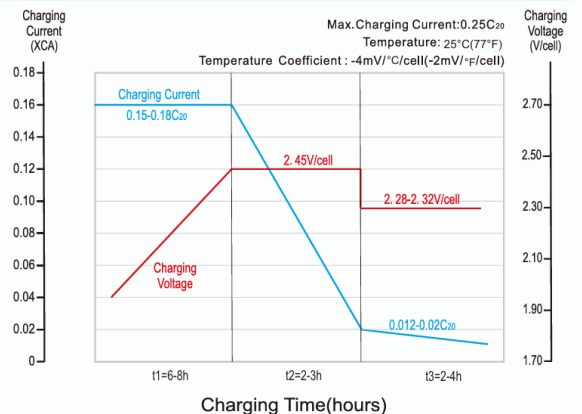

Self-discharge Characteristics

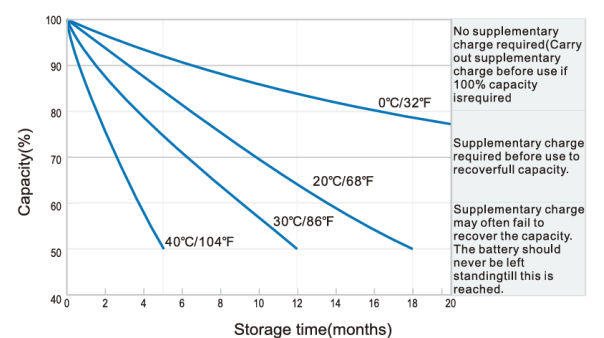

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.